(19) World Intellectual Property Organization

International Bureau



! IODIO BINGIDI II DIGNO NON DBIN COND ONI I II II 88ND NOON IDDI ADNO 1000 1001 1001 DBIN 1001 IDDI NOO 1000

(43) International Publication Date 10 March 2005 (10.03.2005)

 \mathbb{PCT}

(10) International Publication Number WO 2005/021097 A1

(51) International Patent Classification⁷: A62C 3/00, 35/00, 35/58, 37/48, F24F 3/16, 13/02, 7/00

(21) International Application Number:

PCT/FI2004/000512

(22) International Filing Date:

3 September 2004 (03.09.2004)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data: 20031246

3 September 2003 (03.09.2003) FI

(71) Applicant (for all designated States except US): MARI-OFF CORPORATION OY [FI/FI]; Virnatie 3, FI-01300 VANTAA (FI).


- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SUNDHOLM,

Göran [FI/FI]; Ilmari Kiannon kuja 3, FI-04310 TU-USULA (FI). METZGER, Harry [FI/FI]; Aleksis Kiven tie 49, FI-04200 KERAVA (FI).

- (74) Agent: HEINÄNEN OY; Annankatu 31-33 C, FI-00100 HELSINKI (FI).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR REDUCING THE DETRIMENTAL EFFECTS OF A FIRE

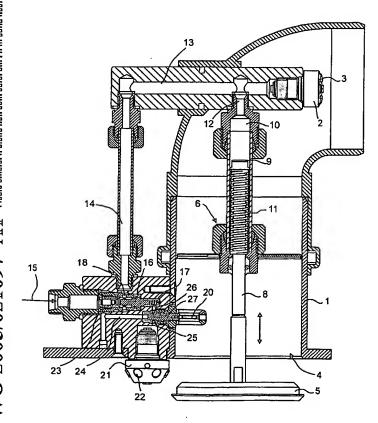

(57) Abstract: A method for reducing the adverse effects of a fire, in which method smoke and combustion gases are removed from a space by spraying through at least one first spray head (2) a mist of a medium into a duct part (1) leading away from the space so as to generate a suction from the space into the duct near the orifice (4) of the duct (1). In a first step, the first spray head (2) is activated and, when necessary, a connection is opened from the space into the duct part (1) via the orifice (4) of the duct part by opening a shutter element (5) and, in a second step, the connection from the space into the duct part (1) is closed by means of the shutter element (5) at least when the temperature of the combustion gases and/or smoke exceeds a predetermined value in the duct part or in its vicinity and, when necessary, the spraying through the first spray head (2) in the duct part (1) is stopped.

WO 2005/021097 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.